


RCCN 日成欧式端子台 端子台 Feed-Through Terminals

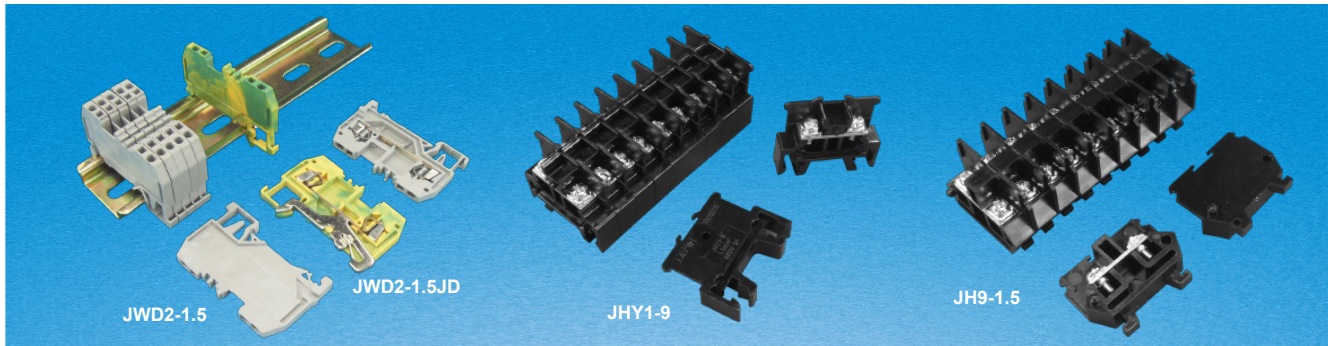

弹片固定结构 Shrapnel fixed construction

型号 Item No.	适用导线 Suitable Wireway mm ²	电流A 电压V Current A Voltage V	适用端子 Suitable terminals	最大宽度 Max. width	包装 Packing
JWD2-1.5	0.1-1.5	18/800	0.5-1.5	52	100
JWD2-1.5/1-2	0.1-1.5	18/800	0.5-1.5	62.5	100
JWD2-1.5/2-2	0.1-1.5	18/800	0.5-1.5	73	100
JWD2-2.5	0.1-2.5	24/800	0.5-2.5	53	100
JWD2-2.5/1-2	0.1-2.5	24/800	0.5-2.5	64	100
JWD2-2.5/2-2	0.1-2.5	24/800	0.5-2.5	75	100
JWD2-4	0.1-4	32/800	0.5-4	59	50
JWD2-4/1-2	0.1-4	32/800	0.5-4	73.5	50
JWD2-4/2-2	0.1-4	32/800	0.5-4	86	50
JWD2-6	0.2-6	41/800	0.5-6	74.5	50
JWD2-6/1-2	0.2-6	41/800	0.5-6	93	50
JWD2-10	0.2-10	57/800	2.5-10	78	25
JWD2-10/1-2	0.2-10	57/800	2.5-10	97.5	25
JWD2-10/1-3	0.2-10	125/800	2.5-10	89	25
JWD2-16	0.2-16	76/800	4-16	94.5	20
JWD2-16/1-2	0.2-16	76/800	4-16	104.5	20
JWD2-35	6-35	125/1000	10-35	100	20
JWD2-1.5JD	0.1-1.5	-	0.5-1.5	52	100
JWD2-1.5/1-2JD	0.1-1.5	-	0.5-1.5	62.5	100
JWD2-1.5/2-2JD	0.1-1.5	-	0.5-1.5	73	100
JWD2-2.5JD	0.1-2.5	-	0.5-2.5	53	100
JWD2-2.5/1-2JD	0.1-2.5	-	0.5-2.5	64	100
JWD2-2.5/2-2JD	0.1-2.5	-	0.5-2.5	75	100
JWD2-4JD	0.1-4	-	0.5-4	59	50
JWD2-4/1-2JD	0.1-4	-	0.5-4	73.5	50
JWD2-4/2-2JD	0.1-4	-	0.5-4	86	50
JWD2-6JD	0.2-6	-	0.5-6	74.5	50
JWD2-6/1-2JD	0.2-6	-	0.5-6	93	50
JWD2-10JD	0.2-10	-	2.5-10	78	25
JWD2-10/1-2JD	0.2-10	-	2.5-10	97.5	25
JWD2-10/1-3JD	0.2-10	-	2.5-10	89	25
JWD2-16JD	0.2-16	-	4-16	94.5	20
JWD2-16/1-2JD	0.2-16	-	4-16	104.5	20
JWD2-35JD	6-35	-	10-35	100	20

材质：尼龙66，
防火等级94-V0，
配套导轨：357.5&3515
说明：JD接地型端子，黄绿色。
本品对应ZDU系列端子。

Material: nylon 66, fireproof 94V-0,
fitting din rail: 35/7.5&35/15/32/15
Note: JD earth connecting
terminals, yellow-green.
Fitting to ZDU series terminals

端子台 Cable terminals

型号 Item No.	适用导线 Suitable Wireway mm ²	电流A 电压V Current A Voltage V	适用端子 Suitable terminals	内置 螺丝 Inside screw	包装 Packing
JHY1-9	0.5-1.5	9/660	1.25-3	M3	50
JHY1-9L	0.5-1.5	9/660	1.25-3	M3	50
JHY1-16	0.5-1.5	16/660	1.25-3	M3	50
JHY1-16L	0.5-1.5	16/660	1.25-3	M3	50
JHY1-25	1.5-2.5	25/660	2-4	M4	50
JHY1-25L	1.5-2.5	25/660	2-4	M4	50
JHY1-32	1.5-4	32/660	2-4	M4	50
JHY1-32L	1.5-4	32/660	2-4	M4	50
JHY1-63	4-16	63/660	8-5	M5	50
JHY1-63L	4-16	63/660	8-5	M5	50
JHY1-100	6-25	100/660	22-6	M6	50
JHY1-100L	6-25	100/660	22-6	M6	50
JHY1-150	25-50	150/660	38-8	M8	20
JHY1-150L	25-50	150/660	38-8	M8	20
JHY1-250	35-100	250/660	80-12	M12	10
JHY1-250L	35-100	250/660	80-12	M12	10
JHY1-400	35-150	400/660	150-12	M12	10
JHY1-400L	35-150	400/660	150-12	M12	10

说明：L型为端面开孔，端子与端子之间并接电线用。

Note: L type is slot opening in the terminal, using of arranging wires among terminals

型号 Item No.	适用导线 Suitable Wireway mm ²	电流A 电压V Current A Voltage V	适用端子 Suitable terminals	内置 螺丝 Inside screw	包装 Packing
JH9-1.5	0.75-1.5	17.5/660	1.25-3	M3	50
JH9-1.5ZG	-	-	-	-	50
JH9-2.5	1-2.5	24/660	2-4	M4	50
JH9-2.5Z	1-2.5	24/660	2-4	M4	50
JH9-2.5ZG	-	-	-	-	50
JH9-6	2.5-6	41/660	5.5-5	M5	50
JH9-6Z	2.5-6	41/660	5.5-5	M5	50
JH9-6ZG	-	-	-	-	50
JH9-10	4-10	57/660	8-6	M6	50
JH9-10Z	4-10	57/660	8-6	M6	50
JH9-10ZG	-	-	-	-	50
JH9-25	10-25	101/660	22-6	M6	50
JH9-25Z	10-25	101/660	22-6	M6	50
JH9-25ZG	-	-	-	-	50

说明：ZG型号为终端固定隔板，Z为终端固定接线端子。

Note: ZG part no. is used for fixing clapboard, Z is used to fixing terminals