




RCCN 日成HDPE波纹管 Polyethylene Corrugated Tubing

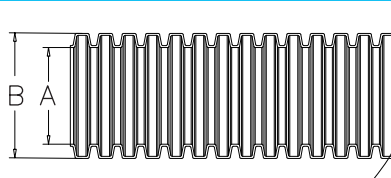

单位/Unit:mm

材质:HDPE 聚乙烯 (Polyethylene)
温度:-30°C-100°C, 短时110°C
结构:内部和外表均为波浪型。
颜色:黑色RAL9005, 深灰色RAL7037
其它颜色可选购有起订量要求。

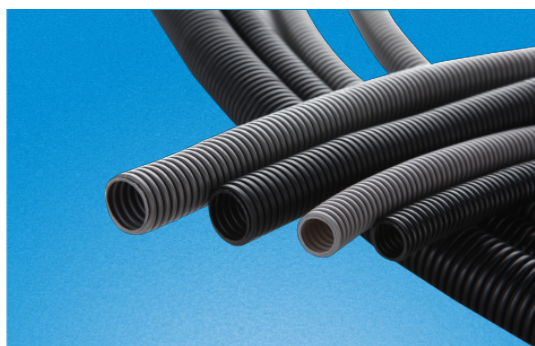

产品认证: 欧洲CE, 欧洲环保ROHS, REACH.

特性: 表面好的光泽; 机械承载强度好; 好的柔软性能;
用途: 可保护电线电缆不受外力磨损及绝缘承载能力: 不容易变形, 但可以迅速恢复, 并且本身无任何损伤。

应用场合: 机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;

使用方法: 将电线电缆穿入管内, 再配合日成系列软管接头使用即可。

备注: 带*号为常规备货型号。
特殊包装长度有起订量要求, 测试温度以日成高低温机测试合格为准, 使用需根据现场环境为准。

Material:HDPE (Polyethylene)

Work Temperature:-30°C to 100°C, 110°C in short time

Color:black/ral9005,gray/ral7037

Certificates: CE,ROHS,REACH.

Characteristics:good luster of exterior, stronger machinism loading, perfect flexible
Functions:insulated,protect cables and wires Loading ability:uneasy to change shape,reshape speedly without hurt body


Where to use:Equipment,machines, electricity sets, and so on

How to use:insert cables or wires to RCCN flexible conduit

Remarks:the items with * are available in stock.special packing length come with MOQ work temperature tested according to RCCN factory test machines

型号	Item No.	规格	内径	外径	静态弯曲半径	动态弯曲半径	包装
黑色 Black	深灰色 Gray	Sizes	I.D.	O.D.	Stat.r	Dyn.r	Packing
Ral9005	Ral7037		A	B			M
BG-07B	BG-07G	1/4"	6.5	10.0	15	35	100M
BG-10B	BG-10G	5/16"	10.0	13.0	20	45	100M
BG-12B	BG-12G	-	12.0	15.8	25	55	100M
BG-15B	BG-15G	3/8"	14.3	18.5	35	65	100M
BG-17B	BG-17G	1/2"	17.0	21.2	40	75	100M
BG-23B	BG-23G	3/4"	23.0	28.5	45	100	50M
BG-29B	BG-29G	1"	29.0	34.5	55	120	50M
BG-36B	BG-36G	1 1/4"	36.0	42.5	65	150	50M
BG-48B	BG-48G	2"	48.0	54.5	80	190	25M
BG-08B	BG-08G	9/32"	8.0	11.5	13	25	100M
BG-11B	BG-11G	-	11.0	14.0	20	45	100M
BG-16B	BG-16G	-	14.5	20.0	25	55	100M
BG-20B	BG-20G	-	20.0	25.0	50	85	50M
BG-25B	BG-25G	-	25.5	31.5	50	110	50M
BG-56B	-	-	56.0	68.0	-	-	10M
BG-63B	-	2 1/2"	63.0	74.0	-	-	10M
BG-67B	-	2 1/2"	67.0	80.0	-	-	10M
BG-76B	-	3"	76.0	88.0	-	-	10M
BG-94B	-	4"	94.0	108.0	-	-	10M

RCCN 日成HDPEV0阻燃波纹管 Polyethylene Corrugated Tubing

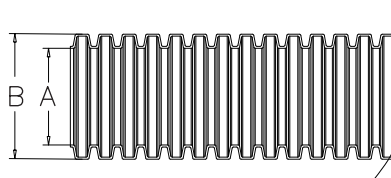

单位/Unit:mm

材质:HDPE 聚乙烯 (Polyethylene)
温度:-30°C-100°C, 短时110°C
结构:内部和外表均为波浪型。
颜色:黑色RAL9005, 深灰色RAL7037
产品认证: 欧洲CE,ROHS.

防火等级:94-V0。

特性: 表面好的光泽; 机械承载强度好; 好的柔软性能;
用途: 可保护电线电缆不受外力磨损及绝缘

承载能力: 不容易变形, 但可以迅速恢复, 并且本身无任何损伤。

应用场合: 机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;

使用方法: 将电线电缆穿入管内, 再配合日成系列软管接头使用即可。

备注: 特殊包装长度有起订量要求, 测试温度以日成高低温机测试合格为准, 使用需根据现场环境为准。另备环保型阻燃管, 有起订量要求。

Material:HDPE (Polyethylene)

Work Temperature:-30°C to 100°C, 110°C in short time

Color:Color:black/ral9005,gray/ral7037

Certificates: CE,ROHS

Inflaming retarding rate:V-0

Characteristics:good luster of exterior, stronger machinism loading, perfect flexible

Functions:insulated,protect cables and wires

Loading ability:uneasy to change shape,reshape speedly without hurt body

Where to use:Equipment,machines, electricity sets, and so on.

How to use:insert cables or wires to RCCN flexible conduit

Remarks:the items with * are available in stock. special packing length come with MOQ work temperature tested according to RCCN factory test machines

型号	Item No.	规格	内径	外径	静态弯曲半径	动态弯曲半径	包装
黑色 Black	深灰色 Gray	Sizes	I.D.	O.D.	Stat.r	Dyn.r	Packing
Ral9005	Ral7037		A	B			M
BG-07BV0	BG-07GV0	1/4"	6.5	10.0	15	35	100M
BG-10BV0	BG-10GV0	5/16"	10.0	13.0	20	45	100M
BG-12BV0	BG-12GV0	-	12.0	15.8	25	55	100M
BG-15BV0	BG-15GV0	3/8"	14.3	18.5	35	65	100M
BG-17BV0	BG-17GV0	1/2"	17.0	21.2	40	75	100M
BG-23BV0	BG-23GV0	3/4"	23.0	28.5	45	100	50M
BG-29BV0	BG-29GV0	1"	29.0	34.5	55	120	50M
BG-36BV0	BG-36GV0	1 1/4"	36.0	42.5	65	150	50M
BG-48BV0	BG-48GV0	2"	48.0	54.5	80	190	25M
BG-08BV0	BG-08GV0	9/32"	8.0	11.5	13	25	100M
BG-11BV0	BG-11GV0	-	11.0	14.0	20	45	100M
BG-16BV0	BG-16GV0	-	14.5	20.0	25	55	100M
BG-20BV0	BG-20GV0	-	20.0	25.0	50	85	50M
BG-25BV0	BG-25GV0	-	25.5	31.5	50	110	50M