


RCCN 日成DF型尼龙铆钉 Drive Fastener

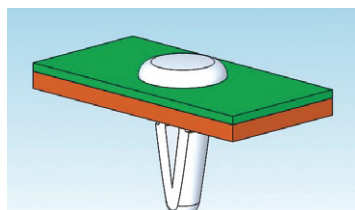

材质:UL合格之NYLON66,防火等级94V-2,不易老化.

用途:PC板及机板之固定,取代螺丝,不需工具即可完成装配.

特点:容易固定.

用法:先将机板及被固定板钻孔,再将本产品塞入,即可使两板相线合.

板厚:以H长度小5mm为准.

开孔:建议表格孔径负公差0.2-1mm开孔.

Material: NYLON66 UL approved,

fireproof 94V-2, Good quality, easy to install

单位/Unit:mm

型号 Item No.	头部 Head W	孔径 Hole dia. W1	长度 Length H	包装 Packing pcs
DF5-589	13	5.0	16.0	100pcs
DF5-491	11	5.0	13.0	100pcs
DF5-210	9.3	5.2	10.9	100pcs
DF5-484	11	5.0	13.0	100pcs
DF5-490	13	5.0	13.0	100pcs
DF5-146	13	5.0	11.0	100pcs
DF5-124	14.1	5.0	11.0	100pcs
DF5-9	13	5.0	15.3	100pcs
DF5-95	13.2	5.0	14.8	100pcs
DF5-96	15.8	5.0	15.2	100pcs
DF5-489	11	5.5	15.0	100pcs
DF6-596	14	6.0	15.0	100pcs
DF6-603	14	6.0	10.0	100pcs
DF6-612	30	6.0	16.0	100pcs
DF6-6	14	6.0	16.2	100pcs
DF7-327	12.2	7.5	15.3	100pcs
DF7-98	15	7.0	20.4	100pcs
DF7-100	14*15	7.0	19.5	100pcs
DF7-119	30.4	7.0	19.1	100pcs
DF7-10	29.9	7.0	17.5	100pcs
DF7-1085	16	7.0	16.0	100pcs
DF8-619	30	8.0	16.0	100pcs
DF8-620	25	8.0	12.0	100pcs

