



# PB external thread T-type three-way pipe joint

## PB external thread T-type three-way pipe joint

Material: plastic socket: POM, body: PBT, adapter: brass

Operating pressure range: 0-10kgf/cm<sup>2</sup>

Operating temperature range: -20~70°C

General hose: PU tube or nylon hose

Color: plastic socket: blue, body: black, adapter: brass (no plating)


### Product Features

1. It has a variety of models and specifications and is used in various pneumatic systems.
2. Excellent flow performance, can pass the flow of the same volume as the inner diameter of the trachea.
3. The threaded part is coated with sealant to ensure that there is no leakage in the threaded connection part.



PB external thread T-type three-way pipe joint

## Specification

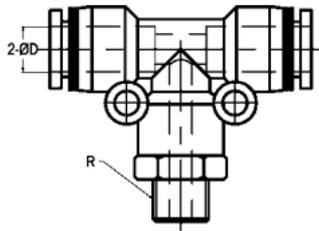

RoHS

Item No.	ØD	Connection thread	package/PCS
PB4-M5	4	M5x0.8	100
PB4-01	4	PT1/8	100
PB4-02	4	PT1/4	100
PB4-04	4	PT1/2	100
PB6-M5	6	M5x0.8	100
PB6-01	6	PT1/8	100
PB6-02	6	PT1/4	100
PB6-03	6	PT3/8	100
PB6-04	6	PT1/2	100
PB8-01	8	PT1/8	100
PB8-02	8	PT1/4	100
PB8-03	8	PT3/8	100
PB8-04	8	PT1/2	100
PB10-01	10	PT1/8	50
PB10-02	10	PT1/4	50
PB10-03	10	PT3/8	50
PB10-04	10	PT1/2	50
PB12-01	12	PT1/8	50
PB12-02	12	PT1/4	50
PB12-03	12	PT3/8	50
PB12-04	12	PT1/2	25

## Product Show


---



# 零部件拆解，全方位解析

PARTS DISMANTLING, COMPREHENSIVE ANALYSIS

追求每个零件的完美统一

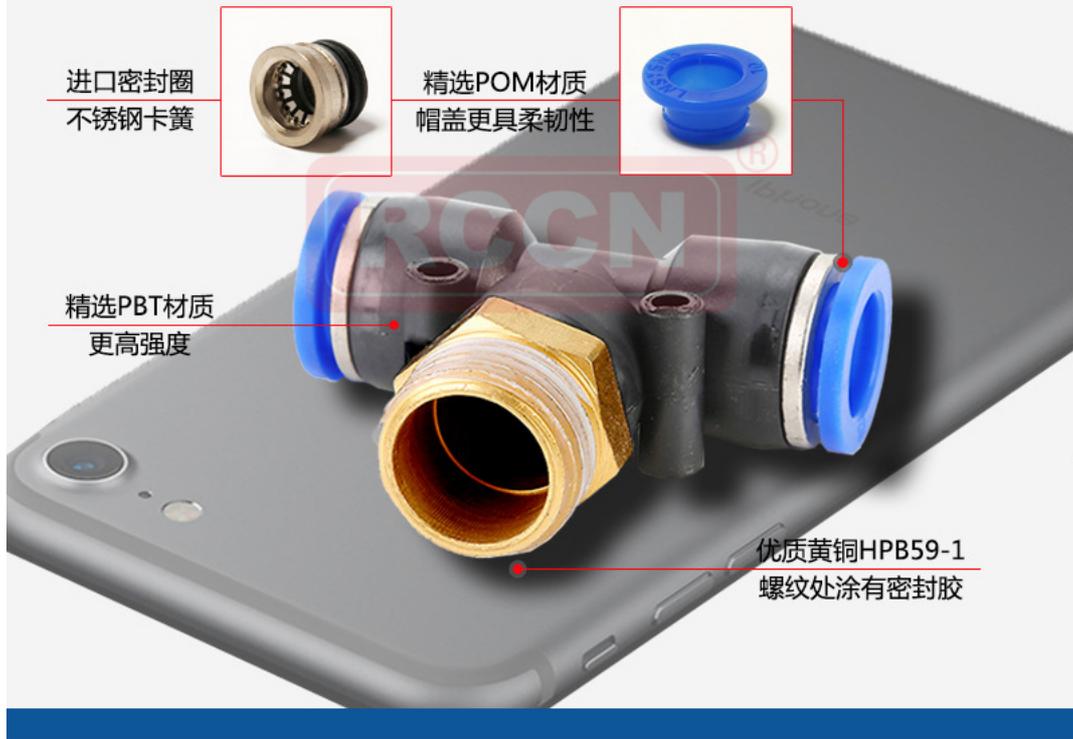

Push-in fittings

## 快插接头 PB外螺纹三通

- 耐高压
- 不脱扣
- 经久耐用
- 种类齐全



